

OIML TC9/SC2

First committee draft revision

Discontinuous totalizing automatic weighing instruments (totalizing hopper weighers)

Part 2: Test report format

Organisation Internationale de Métrologie Légale

INTERNATIONAL RECOMMENDATION

OIML R 107- 2

Nov 2005

EXPLANATORY NOTE

This working draft revision of OIML R 107-2 was prepared by OIML TC 9/ SC 2 *Automatic weighing instruments*, following consultations on the Working Draft Revision in June 2005.

OIML TC 9/ SC 2 “Automatic Weighing instruments”
Secretariat: United Kingdom

Participant States: _____ Observer States: _____

<u>Australia</u>	<u>Bulgaria</u>
<u>Austria</u>	<u>Canada</u>
<u>Belgium</u>	<u>Cyprus</u>
<u>Brazil</u>	<u>Hungary</u>
<u>China, P.R. of</u>	<u>Ireland</u>
<u>Czech Republic</u>	<u>Slovakia</u>
<u>Denmark</u>	<u>Serbia and Montenegro</u>
<u>Finland</u>	
<u>France</u>	
<u>Germany</u>	
<u>Japan</u>	<u>Institutions in liaison:</u>
<u>Korea, Republic of</u>	
<u>Netherlands</u>	<u>BIML</u>
<u>Norway</u>	<u>CECIP</u>
<u>Poland</u>	<u>ISO</u>
<u>Romania</u>	<u>COPAMA</u>
<u>Russian Federation</u>	
<u>Slovenia</u>	
<u>South Africa</u>	
<u>Spain</u>	
<u>Sweden</u>	
<u>Switzerland</u>	
<u>United Kingdom</u>	
<u>USA</u>	

CONTENTS

Forward.....	
Introduction.....	
General information concerning the type.....	
Identification of the instrument.....	
Information concerning the test equipment.....	
Configuration for test.....	
Summary of type evaluation.....	
1 Warm-up time test.....	
2 Zero-setting	
3 Stability of equilibrium	
4 Influence factors:	
4.1 Static temperatures	
4.2 Temperature effect on no load indication.....	
4.3 Damp heat tests	
4.4 AC mains voltage variation	
4.5 Voltage variation in external or plug-in (AC or DC) power, including in-rechargeable battery power supply..	
4.6 Voltage variation in 12 V and 24 V road vehicle batteries.....	
5 Disturbances:	
5.1 Short time power reduction	
5.2 Bursts (transients) on I/O circuits and communication lines and on mains power lines	
5.3 Surges on I/O circuits and communication lines and on mains power lines	
5.4 Electrostatic discharge test	
5.5 Electromagnetic susceptibility test	
5.6 Electrical transient conduction test for instruments powered by road vehicle 12 V and 24 V batteries.....	
6 Span stability	
7 Material tests	
8 Examination of the construction	
9 Checklist	

FOREWORD

The International Organization of Legal Metrology (OIML) is a worldwide, intergovernmental organization whose primary aim is to harmonize the regulations and metrological controls applied by the national metrological services, or related organizations, of its Member States.

The two main categories of OIML publications are:

- 1) **International Recommendations (OIML R)**, which are model regulations that establish the metrological characteristics required of certain measuring instruments and which specify methods and equipment for checking their conformity; the OIML Member States shall implement these Recommendations to the greatest possible extent;
- 2) **International Documents (OIML D)**, which are informative in nature and intended to improve the work of the metrological services.

OIML Draft Recommendations and Documents are developed by technical committees or subcommittees which are formed by the Member States. Certain international and regional institutions also participate on a consultation basis.

Cooperative agreements are established between OIML and certain institutions, such as ISO and IEC, with the objective of avoiding contradictory requirements; consequently, manufacturers and users of measuring instruments, test laboratories, etc. may apply simultaneously OIML publications and those of other institutions.

International Recommendations and International Documents are published in French (F) and English (E) and are subject to periodic revision.

OIML publications may be obtained from the Organization's headquarters:

Bureau International de Métrologie Légale
11, rue Turgot - 75009 Paris - France
Telephone: 33 (0)1 48 78 12 82 and 42 85 27 11
Fax: 33 (0)1 42 82 17 27
E-mail: biml@oiml.org
Internet: <http://www.oiml.org>

*
* *

INTRODUCTION

This "test report format" aims at presenting, in a standardized format, the results of the various tests and examinations to which a type of a totalizing automatic weighing instrument shall be submitted with a view to its approval.

The test report format consists of two parts, a "checklist" and the "test report" itself.

The checklist is a summary of the examinations carried out on the instrument. It includes the conclusions of the results of the test performed, experimental or visual checks based on the requirements of Part 1. The words or condensed sentences aim at reminding the examiner of the requirements in OIML R 107-1 without reproducing them.

The test report is a record of the results of the tests carried out on the instrument. The "test report" forms have been produced based on the tests detailed in OIML R 107-1.

All metrology services or laboratories evaluating types of totalizing automatic weighing instruments accordingly to R 107 or to national or regional regulations based on this OIML Recommendation are strongly advised to use this test report format, directly or after translation into a language other than English or French. Its direct use in English or in French, or in both languages, is even more strongly recommended whenever test results may be transmitted by the country performing these tests to the approving authorities of another country, under bi- or multilateral cooperation agreements. In the framework of the *OIML Certificate System for measuring instruments*, use of this test report format is mandatory.

The "information concerning the test equipment used for type evaluation" shall cover all test equipment which has been used in determining the test results given in a report. The information may be a short list containing only essential data (name, type, reference number for purpose of traceability). For example:

- Verification standards (accuracy, or accuracy class, and No.)
- Simulator for testing of modules (name, type, traceability and No.)
- Climatic test and static temperature chamber (name, type and No.)
- Electrical tests, bursts (name of the instrument, type and No.)
- Description of the procedure of field calibration for the test of immunity to radiated electromagnetic fields

Note concerning the numbering of the following pages

In addition to a sequential numbering: "R 107-2 page .." at the bottom of the pages of this publication, a special place is left at the top of each page (starting with the following page) for numbering the pages of reports established following this model; in particular, some tests (e.g. metrological performance tests) shall be repeated several times, each test being reported individually on a separate page following the relevant format; in the same way, a multiple range instrument shall be tested separately for each range and a separate form (including the general information form) shall be filled out for each range. For a given report, it is advisable to complete the sequential numbering of each page by the indication of the total number of pages of the report.

DISCONTINUOUS TOTALIZING AUTOMATIC WEIGHING INSTRUMENTS (TOTALIZING HOPPER WEIGHERS)

TYPE EVALUATION REPORT

EXPLANATORY NOTES

Meaning of symbols:

I = Indication
 I_n = n^{th} indication
 L = Load
 ΔL = Additional load to next changeover point
 P = $I + \frac{1}{2} d_t - \Delta L$ = Indication prior to rounding (digital indication)
 E = $I - L$ or $P - L$ = Error
 MPE = Maximum permissible error
 EUT = Equipment under test
 d_t = Totalisation scale interval
 $Temp$ = temperature
 $Rel. h$ = relative humidity

The name(s) or symbol(s) of the unit(s) used to express test results shall be specified in each form.

For each test, the "SUMMARY OF TYPE EVALUATION" and the "CHECKLIST" shall be completed according to this example:

when the instrument has passed the test:

when the instrument has failed the test:

when the test is not applicable:

P	F
X	
	X
/	/

P = Passed
F = Failed

The white spaces in boxes in the headings of the report should always be filled according to the following example:

	At start	At end	
Temp:	20.5	21.1	°C
Rel. h:			%
Date:	2002-01-29	2002-01-30	yyyy:mm:dd
Time:	16:00:05	16:30:25	hh:mm:ss

"Date" in the test reports refers to the date that the test was performed.

In the disturbance tests, faults greater than d_t are acceptable provided that they are detected and acted upon, or that they result from circumstances such that these faults shall not be considered as significant; an appropriate explanation shall be given in the column "Yes (remarks)".

Section numbers in brackets refer to the corresponding subclauses of R 107-1.

Deleted: where:
 $Temp$ = temperature
 $Rel. h$ = relative humidity

GENERAL INFORMATION CONCERNING THE TYPE

Application No:

Type designation:

Manufacturer:

Applicant:

Instrument category:

Testing on: ☐ Complete instrument ☐ Module ¹

Accuracy class ☐ 0.2 ☐ 0.5 ☐ 1 ☐ 2

Min = Σ_{min} =

Max =

T + = T - = d = d_t =

U_{nom} ² = V U_{min} = V U_{max} = V f = Hz Battery, U = V

Zero-setting device:

☐ Nonautomatic

☐ Semi-automatic

☐ Automatic zero-setting

☐ Initial zero-setting

☐ Zero-tracking

Initial zero-setting range %

Temperature range °C

Printer: ☐ Built in ☐ Connected ☐ Not present but connectable ☐ No Connection

¹ The test equipment (simulator or part of a complete instrument) connected to the module shall be defined in the test form(s) used.

² Voltage U_{nom} is the nominal voltage, or the average if a voltage range, marked on the instrument.

GENERAL INFORMATION CONCERNING THE TYPE (continued)

Instrument submitted:		Loadcell:	
Identification No:		Manufacturer:	
Connected equipment:		Type:	
Remarks:		Capacity:	
		Number:	
Interfaces: (numbers, nature)		Classification symbol:	
Remarks:	see below		
Date of report:		Evaluation period:	
Observer:			

Use this space to indicate additional remarks and/or information: other connected equipment, interfaces and load cells, choice of the manufacturer regarding protection against disturbances, etc.

IDENTIFICATION OF THE INSTRUMENT

Application No:

Report date:

Type designation:

Manufacturer:

Serial No:

Manufacturing Documentation

(Record as necessary to identify the equipment under test)

System or module name	Drawing number or software reference	Issue level	Serial No.
.....			
.....			
.....			
.....			
.....			
.....			
.....			

Simulator documentation

System or module name	Drawing number or software reference	Issue level	Serial No.
.....			
.....			
.....			

Simulator function (summary)

Simulator description and drawings, block diagram etc should be attached to the report if available.

IDENTIFICATION OF THE INSTRUMENT (continued)

Application No:

Report date:

Type designation:

Manufacturer:

Description or other information pertaining to identification of the instrument:
(attach photograph here if available)

INFORMATION CONCERNING THE TEST EQUIPMENT USED FOR TYPE EVALUATION

TEST EQUIPMENT

Application No:

Report date:

Type designation:

Manufacturer:

List all test equipment used in this report

Equipment name	Manufacturer	Type No Serial No:	Used for: (test references)
.....			
.....			
.....			

CONFIGURATION FOR TEST

Application No:

Report date:

Type designation:

Manufacturer:

Use this space for additional information relating to equipment configuration, interfaces, data rates, load cells EMC protection options etc, for the instrument and/or simulator.

SUMMARY OF TYPE EVALUATION

Application No:

Type designation:

	TESTS	Report page	Passed	Failed	Remarks
1	Warm-up time test				
2	Zero-setting				
3	Stability of equilibrium				
4	Influence factors				
4.1	Static temperatures				
4.2	Temperature effect on no load indication				
4.3	Damp heat tests:				
4.3.1	Damp heat, steady state				
4.3.2	Damp heat, cyclic				
4.4	AC mains voltage variation				
<u>4.5</u>	<u>Voltage variations in external or plug-in (AC/DC) mains power including in-line rechargeable battery power</u>				
<u>4.6</u>	<u>Voltage variation in 12 V and 24 V road vehicle batteries</u>				
5	Disturbances				
5.1	Short time power reductions				
5.2	Electrical bursts <u>on I/O circuits and communication lines and on mains power lines</u>				
5.3	<u>Electrical surges on I/O circuits and communication lines and on mains power lines and on mains power lines</u>				
5.4	Electrostatic discharge <u>test</u>				
5.5	Electromagnetic susceptibility <u>test</u>				
5.6	<u>Electrical transient conduction test for instruments powered by road vehicle 12 V and 24 V batteries</u>				
6	Span stability				
7	Material tests				
7.1	Separate verification method				
7.2	Integral verification method				
	EXAMINATIONS				
8	Examination of the construction				
9	Checklist				

SUMMARY OF TYPE EVALUATION (continued)

Use this page to detail remarks from the summary of the type evaluation.

1 WARM-UP TIME (4.2.5, A.5.4)

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td></td><td></td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td></td><td></td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td></td><td></td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td></td><td></td></tr></table> hh:mm:ss				
	Bar. Pres: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td></td><td></td></tr></table> hPa				

Control scale interval d :

Resolution during test (smaller than d):

Duration of disconnection before test: hours Deleted: hrs

Automatic zero-setting and zero-tracking device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation³

$$E = I + \frac{1}{2} d - \Delta L - L$$

E_0 = error calculated prior to each measurement at zero or near zero (unloaded)

E_L = error calculated at load (loaded)

time (*)	Load L	Indication I	Add load ΔL	Error	$E_L - E_0$
-------------	-----------	-----------------	------------------------	-------	-------------

Unloaded	0 min				$E_{0I} =$
Loaded					$E_L =$

Unloaded	5 min				$E_0 =$
Loaded					$E_L =$

Unloaded	15 min				$E_0 =$
Loaded					$E_L =$

Unloaded	30 min				$E_0 =$
Loaded					$E_L =$

(*)Counted from the moment an indication has first appeared.

Error ⁴		MPE	
Initial zero-setting error	E_{0I}	$\leq 0.25 d$	=
Maximum value of error unloaded	E_0	$\leq 0.5 d$	=
Maximum value of zero variation	$ E_0 - E_{0I} $	$\leq 0.25 d * P$	=
Maximum value of error loaded	$E_L - E_0$	$\leq MPE * P_I$	=

☐ Passed ☐ Failed

Remarks:

³ In operation only if zero operates as part of every automatic weighing cycle

⁴ Check that the error is $\leq$ the MPE

2 ZERO-SETTING (3.6.1, [A.5.5](#))

Application No:	Temp: <table border="1" style="display: inline-table;"><tr><td>At start</td><td>At end</td></tr><tr><td></td><td></td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table;"><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table;"><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table;"><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table> hh:mm:ss				

Control scale interval d :

Resolution during test (smaller than d):

2.1 Modes of zero-setting ([A.5.5.1](#))

Modes of zero-setting	Present	Range tested	Accuracy tested
Non-automatic			
Semi-automatic			
Auto zero at start of automatic operation			
Auto-zero as part of every weighing cycle			
Auto-zero after programmable interval			

2.2 Range of zero-setting ([A.5.5.2](#))

2.2.1 Initial zero-setting range ([A.5.5.2.1](#))

Positive range L_p		Negative range L_n		Zero setting range $L_p + L_n$	% of Max load

2.2.2 Automatic zero-setting range ([A.5.5.4](#))

Weight added	Zero Yes/No	Zero setting range	% of Max load

2.3 Accuracy of zero-setting ([A.5.5.5](#))

$$P = I + \frac{1}{2} d - \Delta L$$

$$E = I - L \text{ or } P - L = \text{Error}$$

Zero-setting mode:	Add. Load ΔL	$E = I + \frac{1}{2} d - \Delta L$	E/d

☐ Passed
☐ Failed

Remarks:

2 ZERO-SETTING (continued)**2.4 Zero offset interlock (3.6.1.3, A.6.8)**

Method of zero-setting:

☐	Non-automatic
☐	Semi-automatic
☐	Auto zero at start of automatic operation
☐	Auto-zero as part of every weighing cycle
☐	Auto-zero after programmable interval

Positive offset:

Load applied after zeroing:		
Automatic operation	inhibited	☐
	Not inhibited	☐

Negative offset:

Load removed after zeroing:		
Automatic operation	inhibited	☐
	Not inhibited	☐

☐Passed☐FailedRemarks:

3 STABILITY OF EQUILIBRIUM (3.3.7, A.6.1)

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 50px; text-align: center;">At start</td><td style="width: 50px; text-align: center;">At end</td></tr><tr><td style="height: 20px;"></td><td style="background-color: #cccccc;"></td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 50px; text-align: center;">At start</td><td style="width: 50px; text-align: center;">At end</td></tr><tr><td style="height: 20px;"></td><td style="background-color: #cccccc;"></td></tr></table> %	At start	At end		
At start	At end				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 50px; text-align: center;">At start</td><td style="width: 50px; text-align: center;">At end</td></tr><tr><td style="height: 20px;"></td><td style="background-color: #cccccc;"></td></tr></table> yyyy:mm:dd	At start	At end		
At start	At end				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 50px; text-align: center;">At start</td><td style="width: 50px; text-align: center;">At end</td></tr><tr><td style="height: 20px;"></td><td style="background-color: #cccccc;"></td></tr></table> hh:mm:ss	At start	At end		
At start	At end				

In the case of printing or data storage

Load =

Printing or data storage			
Number	First printed or stored value after manual disturbance and command	Reading during 5 seconds after print-out or storage	
		Minimum	Maximum
<u>1</u>			
<u>2</u>			
<u>3</u>			
<u>4</u>			
<u>5</u>			

Check separately for each of the 5 tests if only two adjacent figures appear, one being the printed value

In the case of zero-setting

 $E = I + \frac{1}{2} d - \Delta L - L$ L = zero or near zero

Zero-setting				
Number	Load L	Indication I	Add. load ΔL	Error E
<u>1</u>				
<u>2</u>				
<u>3</u>				
<u>4</u>				
<u>5</u>				

Check the accuracy according to A.5.5.5 for zero-setting.

☐ Passed☐ Failed

Remarks:

4 INFLUENCE FACTORS (2.7, A.7.3)**4.1 Static temperatures (2.7.1, A.7.3.1)****Test 1 Static temperature, reference 20°C**

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: top;"><tr><th>At start</th><th>At end</th></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end								
At start	At end										
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: top;"><tr><th>At start</th><th>At end</th></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> %	At start	At end								
At start	At end										
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: top;"><tr><th>At start</th><th>At end</th></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> yyyy:mm:dd	At start	At end								
At start	At end										
	Time: <table border="1" style="display: inline-table; vertical-align: top;"><tr><th>At start</th><th>At end</th></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> hh:mm:ss	At start	At end								
At start	At end										
	Bar. Pres: <table border="1" style="display: inline-table; vertical-align: top;"><tr><th>At start</th><th>At end</th></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table> hPa	At start	At end								
At start	At end										
Control scale interval d :											
Totalisation scale interval d_t :											

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_o \text{ with } E_o = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$

Remarks

☐

Passed

☐

Failed

Deleted: ¶

Note: Tests shall be performed in accordance with the temperature sequence specified in A.7.3.1 and recorded on additional test reports.¶

Test 2 Static temperature, specified high (°C)

Application No: Temp: At start At end °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss
 Bar. Pres: hPa
 Control scale interval d :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_o \text{ with } E_o = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation I_c	Totalisation before adding load I_b	Totalisation after adding load I_a	Indicated change in totalisation $I_t = I_a - I_b$	Error $I_c - I_t$

☐ Passed ☐ Failed

Remarks

Test 3 Static temperature, specified low (°C)

		At start	At end	
Application No:		Temp:		°C
Type designation:		Rel. h:		%
Observer:		Date:		yyyy:mm:dd
		Time:		hh:mm:ss
		Bar. Pres:		hPa

Control scale interval d_c :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

[illegible]

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

[illegible]

☐ Passed ☐ Failed

Remarks

Test 4 Static temperature, 5°C

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

At start	At end

 %
 Observer: Date:

At start	At end

 yyyy:mm:dd
 Time:

At start	At end

 hh:mm:ss
 Bar. Pres:

At start	At end

 hPa
 Control scale interval d_i :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation I_c	Totalisation before adding load I_b	Totalisation after adding load I_a	Indicated change in totalisation $I_i = I_a - I_b$	Error $I_c - I_i$

☐

Passed

☐

Failed

Remarks

Test 5 Static temperature, reference 20°C

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

At start	At end

 %
 Observer: Date:

At start	At end

 yyyy:mm:dd
 Time:

At start	At end

 hh:mm:ss
 Bar. Pres:

At start	At end

 hPa
 Control scale interval d :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation I_c	Totalisation before adding load I_b	Totalisation after adding load I_a	Indicated change in totalisation $I_i = I_a - I_b$	Error $I_c - I_i$

☐

Passed

☐

Failed

Remarks

Application No:

Type designation:

Observer:

Control scale interval d :

Resolution during test (smaller than d):

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

Report Page ⁵	Date	Time	Temp (°C)	Zero indication I	Add load ΔL	P	ΔP	$\Delta Temp$	Zero-change per ... °C

ΔTemp = difference of temperature for two consecutive tests at different temperatures
Check if the zero-change per 5 °C is smaller than d .

Remarks:

R107-2 Page 22 of 74

4.3 Damp heat tests (4.2.3, A.7.3.3)

Note: Either the steady-state test (4.3) or the cyclic test (4.4) shall be prescribed depending upon the type of the EUT and its application as specified in 4.2.3.

4.3.1 Damp heat, steady state (non-condensing) (A.7.3.3.1)**Test 1** Reference temperature of 20 °C at 50 % humidity

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> hh:mm:ss				

Control scale interval d :

Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero } (*)$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test ()	At end of test ()	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$

☐ Passed ☐ Failed

Remarks

Deleted: ¶
 Note: Tests shall be performed in accordance with the temperature/humidity sequence specified in A.7.3.3.1 and recorded on additional test reports.¶
 ¶

4.3.1 Damp heat, steady state (continued)

Test 2 Upper limit temperature (°C) at 85 % humidity

Application No:
Type designation:
Observer:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy:mm:dd
Time:			hh:mm:ss

Control scale interval d : _____
 Totalisation scale interval d_t : _____

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero } (*)$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

[illegible]

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test ()	At end of test ()	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

[illegible]

☐ Passed ☐ Failed

Remarks

4.3.1 Damp heat, steady state (continued)**Test 3** Reference temperature of 20 °C at 50 % humidity

Application No: Temp: At start At end °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss
 Control scale interval d :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test ()	At end of test ()	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation I_c	Totalisation before adding load I_b	Totalisation after adding load I_a	Indicated change in totalisation $I_i = I_a - I_b$	Error $I_c - I_i$

☐

Passed

☐

Failed

Remarks

4.3 Damp heat tests (continued)

4.3.2 Damp heat, cyclic (**condensing**) (A.7.3.3.2)**Test 1** Temperature rise from 25 ° at 93 % humidity C during the first 3 hours.

Application No: Temp: At start At end °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss
 Control scale interval d :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

 $E = I + \frac{1}{2} d - \Delta L - L$, $E_c = E - E_o$ with E_o = error calculated at or near zero (*)

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error E		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$

Note: This test is applicable only for instruments to be installed in environments of high condensation or cyclic temperature changes.

☐ Passed ☐ Failed

Remarks

Deleted: (1) . Tests shall be performed in accordance with the temperature/humidity sequence specified in A.7.3.3.2 and recorded on additional test reports.¶
 ¶
 . . . (2) .

4.3.2 Damp heat, cyclic (continued)**Test 2** Temperature maintained at the upper limit of 40 °C and 93 % humidity until 12 hours from start of the cycle.

Application No:	Temp:	At start	At end	°C
Type designation:	Rel. h:			%
Observer:	Date:			yyyy:mm:dd
	Time:			hh:mm:ss

Control scale interval d :

Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error E		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$

.

☐

Passed

☐

Failed

Remarks

4.3.2 Damp heat, cyclic (continued)**Test 3** Temperature lowered to 25 °C at 93 % humidity within 3-6 hours.

Application No: Temp: At start At end °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss
 Control scale interval d_c :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error E		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$

.

☐

Passed

☐

Failed

Remarks

4.3.2 Damp heat, cyclic (continued)**Test 4** Temperature maintained at 25 °C at 93 % humidity until the 24-hour cycle is completed.

Application No: Temp: At start At end °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss
 Control scale interval d_c :
 Totalisation scale interval d_t :

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Load L	Indication I		Add load ΔL		Error E		Corrected error E_c		MPE
	↓	↑	↓	↑	↓	↑	↓	↑	
(*)					(*)				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication		
At start of test	At end of test	Max deviation observed (except for non-recordable transients)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$

.

☐

Passed

☐

Failed

Remarks

4.4 AC mains voltage variation (2.7.2, A.7.3.4)

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> hh:mm:ss				

Control scale interval d :

Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation
Marked nominal voltage (U_{nom}) or voltage range: V

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Voltage conditions ⁶	Load L	Indication I	Add load ΔL	Error	Corrected error E_c
U_{nom}			(*)		
U_{nom} or $U_{max} \times 1.10\%$					
U_{nom} or $U_{min} \times 0.85\%$					
U_{nom}					

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Voltage conditions	Totalisation indication		
	At start of test	At end of test	Max deviation observed (except for non-recordable transients)
U_{nom}			
U_{nom} or $U_{max} \times 1.10\%$			
U_{nom} or $U_{min} \times 0.85\%$			
U_{nom}			

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Voltage conditions	Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$
U_{nom}						
U_{nom} or $U_{max} \times 1.10\%$						
U_{nom} or $U_{min} \times 0.85\%$						
U_{nom}						

☐ Passed ☐ Failed

Remarks

|

⁶ (a) U_{nom} is the nominal voltage marked on the instrument; if a range of voltages is marked then the test shall be performed at $U_{max} \times 1.10\%$ (highest value of the range) and at $U_{min} \times 0.85\%$ (lowest value of the range).

(b) In the case of three-phase mains power, the voltage variations shall apply for each phase successively.

|

4.5 Voltage variation in external or plug-in (AC/DC) mains power including in-line rechargeable battery power (2.7.2, A.7.3.5)

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

At start	At end

 %
 Observer: Date:

At start	At end

 yyyy:mm:dd
 Time:

At start	At end

 hh:mm:ss

Control scale interval d :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

Marked nominal voltage (U_{nom}) or voltage range: V

$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Voltage conditions ⁷	Load L	Indication I	Add load ΔL	Error	Corrected error E_c
U_{nom}			(*)		
$U_{nom} \text{ or } U_{max} \times 1.20 \%$					
U_{min} (minimum operating voltage)					
U_{nom}					

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Voltage conditions	Totalisation indication		
	At start of test	At end of test	Max deviation observed (except for non-recordable transients)
U_{nom}			
$U_{nom} \text{ or } U_{max} \times 1.20 \%$			
U_{min} (minimum operating voltage)			
U_{nom}			

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Voltage conditions	Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Error $T_c - T_i$
U_{nom}						
$U_{nom} \text{ or } U_{max} \times 1.10 \%$						
U_{min} (minimum operating voltage)						
U_{nom}						

☐ Passed ☐ Failed

Remarks:

⁷ U_{nom} is the nominal voltage marked on the instrument; if a range of voltages is marked then the test shall be performed at $U_{max} \times 1.20\%$ (highest value of the range) and at the minimum operating voltage.

4.7 Voltage variations in 12 V and 24 V road vehicle batteries (2.7.2, A.7.3.6)

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

--

 %
 Observer: Date:

--

 yyyy:mm:dd
 Time:

--

 hh:mm:ss
 Control scale interval d :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

Marked nominal voltage (U_{nom}) of the vehicle's electrical system:

--

 V
$$E = I + \frac{1}{2} d - \Delta L - L, \quad E_c = E - E_0 \text{ with } E_0 = \text{error calculated at or near zero (*)}$$

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Voltage conditions U_{nom} ⁸	Test limits		Load L	Indication I	Add load ΔL	Error E	Corrected error E_c
12 V	$U_{max} =$	16 V				(*)	
	$U_{min} =$	9 V					
24 V	$U_{max} =$	32 V					
	$U_{min} =$	16 V					

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Totalisation indication				
Voltage conditions	Test limits		At start of test	At end of test
12 V	$U_{max} =$	16 V		
	$U_{min} =$	9 V		
24 V	$U_{max} =$	32 V		
	$U_{min} =$	16 V		

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Voltage conditions U_{nom}	Test limits		Static Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_I = T_a - T_b$	Error $T_c - T_I$
12 V	$U_{max} =$	16 V						
	$U_{min} =$	9 V						
24 V	$U_{max} =$	32 V						
	$U_{min} =$	16 V						

☐ Passed ☐ Failed

Remarks:

⁸The nominal voltage (U_{nom}) of the vehicle's electrical system is usually 12 V or 24 V. However, the practical voltage at the battery-terminals of a road vehicle can vary considerably.

5 DISTURBANCES (4.1.2, A.7.4)

5.1 Short time power reductions (A.7.4.1)

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> hh:mm:ss				
Control scale interval d :					
Totalisation scale interval d_t :					

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation
Marked nominal voltage (U_{nom}) or voltage range: V

Pre-test information

Disturbance parameters			
Amplitude % of U_{nom} ⁹	Duration cycles	Number of disturbances	Repetition Interval (s)
0	0.5	10	
50	1	10	

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Disturbance	Result		
Amplitude % of U_{nom} (other pre-test information)	Load	Indication I	Significant fault (>1 d_t) No Yes (remarks)
without disturbance			
0			
50			

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Disturbance	Result		
Amplitude % of U_{nom} (other pre-test information)	Totalisation indication		Significant fault (>1 d_t)
	At start of test	At end of test	No Yes (remarks)
without disturbance			
0			
50			

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Disturbance	Result					Significant fault ($T_c - T_i$)	
Amplitude % of U_{nom} (other pre-test information)	Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	No	Yes (remarks)
without disturbance							
0							
50							

☐ Passed ☐ Failed

⁹ In case a voltage-range is marked, use the average value as U_{nom} .

Remarks:

5.2 Bursts (transients) on I/O circuits and communication lines and on mains power lines (A.7.4.2)

5.2.1 Mains power lines

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss

Control scale interval d :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent
 ☐ Not in operation
 ☐ Out of working range
 ☐ In operation

Mains power lines: test voltage 1.0 kV, duration of the test 2 minutes at each amplitude and polarity

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Connection	Polarity	Result			
		Load	Indication I	Significant fault ($> 1 d_t$)	
				No	Yes (remarks)
without disturbance					
Live ↓ ground	pos				
	neg				
without disturbance					
Neutral ↓ ground	pos				
	neg				
without disturbance					
Protective earth ↓ ground	pos				
	neg				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Connection	Polarity	Result			
		Totalisation indication		Significant fault ($> 1 d_t$)	
		At start of test	At end of test	No	Yes (remarks)
without disturbance					
Live ↓ ground	pos				
	neg				
without disturbance					
Neutral ↓ ground	pos				
	neg				
without disturbance					
Protective earth ↓ ground	pos				
	neg				

5.2.1 Mains power lines (continued)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Connection	Polarity	Result						
		Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Significant fault ($T_c - T_i$)	
							No	Yes (remarks)
without disturbance								
Live ↓ ground	pos							
	neg							
without disturbance								
Neutral ↓ ground	pos							
	neg							
without disturbance								
Protective earth ↓ ground	pos							
	neg							

☐

Passed

☐

Failed

Remarks:

5.2 Bursts (transients) on I/O circuits and communication lines and on mains power lines (continued)

5.2.2 I/O circuits and communication lines

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> hh:mm:ss				

Control scale interval d :

Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent
 ☐ Not in operation
 ☐ Out of working range
 ☐ In operation

I/O signals, data and control lines: test voltage 0.5 kV, duration of the test 2 min at each amplitude and polarity

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Cable/Interface	Polarity	Result			
		Load	Indication I	No	Significant fault (>1 d_t) Yes (remarks)
	without disturbance				
C/1,1	pos				
	neg				
	without disturbance				
C/1,2	pos				
	neg				
	without disturbance				
C/1,3	pos				
	neg				
	without disturbance				
C/1,4	pos				
	neg				
	without disturbance				
C/1,5	pos				
	neg				
	without disturbance				
C/1,6	pos				
	neg				

- Notes: (1) Explain or make a sketch indicating where the clamp is located on the cable; if necessary, add additional page.
- (2) The cell references C/1,1 to C/1,6 should be used to cross-reference the cable or interface between Tables A and B.

5.2.2 I/O circuits and communication lines (continued)

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Cable/Interface	Polarity	Result			
		At start of test	At end of test	Significant fault (>1 d _i)	
				No	Yes (remarks)
	without disturbance				
C/1,1	pos				
	neg				
	without disturbance				
C/1,2	pos				
	neg				
	without disturbance				
C/1,3	pos				
	neg				
	without disturbance				
C/1,4	pos				
	neg				
	without disturbance				
C/1,5	pos				
	neg				
	without disturbance				
C/1,6	pos				
	neg				

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Cable/Interface	Polarity	Result					Significant fault (T _c - T _i)	
		Load	Calculated change in totalisation T _c	Totalisation before adding load T _b	Totalisation after adding load T _a	Indicated change in totalisation T _i = T _a - T _b		
							No	Yes (remarks)
	without disturbance							
C/1,1	pos							
	neg							
	without disturbance							
C/1,2	pos							
	neg							
	without disturbance							
C/1,3	pos							
	neg							
	without disturbance							
C/1,4	pos							
	neg							
	without disturbance							
C/1,5	pos							
	neg							
	without disturbance							
C/1,6	pos							
	neg							

☐ Passed

☐ Failed

Remarks:

5.3 **Surges on I/O circuits and communication lines and on mains power lines (A.7.4.3)**

5.3.1 **Mains power lines**

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

At start	At end

 %
 Observer: Date:

At start	At end

 yyyy:mm:dd
 Time:

At start	At end

 hh:mm:ss
 Control scale interval d :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

Mains power line: test voltage 0.5 kV (line to line) and 1.0 kV (line to earth), duration of test > 1 minute at each amplitude and polarity

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Connection	Polarity	Result			
		Load	Indication I	Significant fault (>1 d_t)	
				No	Yes (remarks)
without disturbance					
Live ↓	pos				
ground	neg				
without disturbance					
Neutral ↓	pos				
ground	neg				
without disturbance					
Protective earth ↓	pos				
ground	neg				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Connection	Polarity	Result			
		Totalisation indication		Significant fault (>1 d_t)	
		At start of test	At end of test	No	Yes (remarks)
without disturbance					
Live ↓	pos				
ground	neg				
without disturbance					
Neutral ↓	pos				
ground	neg				
without disturbance					
Protective earth ↓	pos				
ground	neg				

5.3.1 Mains power lines (continued)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Connection	Polarity	Result						
		Load	Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	Significant fault ($T_c - T_i$)	
							No	Yes (remarks)
without disturbance								
Live ↓ ground	pos							
	neg							
without disturbance								
Neutral ↓ ground	pos							
	neg							
without disturbance								
Protective earth ↓ ground	pos							
	neg							

☐

Passed

☐

Failed

Remarks (including additional test set-up information):

5.3.2 Surges on I/O circuits and communication lines

Application No: Temp: At start At end °C
 Type designation: Rel. h: %
 Observer: Date: yyyy:mm:dd
 Time: hh:mm:ss
 Control scale interval d_c :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent
 ☐ Not in operation
 ☐ Out of working range
 ☐ In operation

I/O signals, data and control lines: test voltage 0.5 kV, duration of the test 2 min at each amplitude and polarity

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Cable/Interface	Polarity	Result			
		Load	Indication !	No	Significant fault (>1 d _f) Yes (remarks)
without disturbance					
C/1.1	pos				
	neg				
without disturbance					
C/1.2	pos				
	neg				
without disturbance					
C/1.3	pos				
	neg				
without disturbance					
C/1.4	pos				
	neg				
without disturbance					
C/1.5	pos				
	neg				
without disturbance					
C/1.6	pos				
	neg				

Notes: (1) Explain or make a sketch indicating where the clamp is located on the cable; if necessary, add additional page.

(2) The cell references C/1.1 to C/1.6 should be used to cross-reference the cable or interface between Tables A and B.

5.3.2 Surges on I/O circuits and communication lines (continued)

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Cable/Interface	Polarity	Result			
		At start of test	At end of test	No	Significant fault (>1 d) Yes (remarks)
	without disturbance				
C/1.1	pos				
	neg				
	without disturbance				
C/1.2	pos				
	neg				
	without disturbance				
C/1.3	pos				
	neg				
	without disturbance				
C/1.4	pos				
	neg				
	without disturbance				
C/1.5	pos				
	neg				
	without disturbance				
C/1.6	pos				
	neg				

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Cable/Interface	Polarity	Load	Result				Significant fault ($T_c - T_i$)	
			Calculated change in totalisation T_c	Totalisation before adding load T_b	Totalisation after adding load T_a	Indicated change in totalisation $T_i = T_a - T_b$	No	Yes (remarks)
		without disturbance						
C/1.1	pos							
	neg							
		without disturbance						
C/1.2	pos							
	neg							
		without disturbance						
C/1.3	pos							
	neg							
		without disturbance						
C/1.4	pos							
	neg							
		without disturbance						
C/1.5	pos							
	neg							
		without disturbance						
C/1.6	pos							
	neg							

☐ Passed☐ Failed

Remarks:

5.4 Electrostatic discharge test (A.7.4.4)

5.4.1 Direct application

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

--	--

 %
 Observer: Date:

--	--

 yyyy:mm:dd
 Time:

--	--

 hh:mm:ss

Control scale interval d :
 Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation

☐ Contact discharges ☐ Paint penetration

☐ Air discharges Polarity ¹⁰: ☐ pos ☐ neg

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Discharges			Result		
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Load	Indication I	Significant fault ($>1 d_t$)
					No Yes (remarks)
without disturbance					
2					
4					
6					
8 (air discharges)					

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Discharges			Result		
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	At start of test	At end of test	Significant fault ($>1 d_t$)
					No Yes (remarks)
without disturbance					
2					
4					
6					
8 (air discharges)					

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Discharges			Result					Significant fault ($T_c - T_i$)	
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Load	Calculated change T_c	Before adding load T_b	After adding load T_a	Indicated change $T_i = T_a - T_b$	No	Yes (remarks)
without disturbance									
2									
4									
6									
8 (air discharges)									

Note: If the EUT fails, the test point at which this occurs shall be recorded.

☐ Passed ☐ Failed

Remarks:

¹⁰ IEC 61000-4-2 specifies that the test shall be conducted with the most sensitive polarity.

5.4 Electrostatic discharge test (continued)**5.4.2 Indirect application (contact discharges only)**

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> hh:mm:ss				

Control scale interval d :

Totalisation scale interval d_t :

Automatic zero-setting device is:

☐ Non-existent ☐ Not in operation ☐ Out of working range ☐ In operation
Polarity ¹¹: pos neg**Result sheet A** - Used in conjunction with result sheet B when the integral control device is used to determine the error

Horizontal coupling plane

Discharges			Result		
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Load	Indication I	Significant fault ($>1 d_t$)
					No Yes (remarks)
without disturbance					
2					
4					
6					

Vertical coupling plane

Discharges			Result		
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Load	Indication I	Significant fault ($>1 d_t$)
					No Yes (remarks)
without disturbance					
2					
4					
6					

¹¹ IEC 61000-4-2 specifies that the test shall be conducted with the most sensitive polarity.

5.4.2 Indirect application – contact discharges only (continued)

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Horizontal coupling plane

Discharges			Result			
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Totalisation		Significant fault ($>1 d_t$)	
			At start of test	At end of test	No	Yes (remarks)
without disturbance						
2						
4						
6						

Vertical coupling plane

Discharges			Result			
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Totalisation		Significant fault ($>1 d_i$)	
			At start of test	At end of test	No	Yes (remarks)
without disturbance						
2						
4						
6						

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Horizontal coupling plane

Discharges			Result						
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Totalisation					Significant fault (T _c - T _i)	
			Load ()	Calculated change T _c	Before adding load T _b	After adding load T _a	Indicated change T _i = T _a - T _b	No	Yes (remarks)
without disturbance									
2									
4									
6									

Vertical coupling plane

Discharges			Result						
Test Voltage (kV)	Number of discharges ≥ 10	Repetition Interval (s)	Totalisation					Significant fault (T _c - T _i)	
			Load ()	Calculated change T _c	Before adding load T _b	After adding load T _a	Indicated change T _i = T _a - T _b	No	Yes (remarks)
without disturbance									
2									
4									
6									

Note: If the EUT fails, the test point at which this occurs shall be recorded.

Remarks: ☐ Passed ☐ Failed

5.4 Electrostatic discharge test (continued)

Specification of test points of EUT (direct application), e.g. by photos or sketches

a) Direct application

Contact discharges:

Air discharges:

b) Indirect application

5.5 Electromagnetic susceptibility **test** (A.7.4.5)

5.5.1 Radiated electromagnetic susceptibility (A.7.4.5.1)

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

 %
 Observer: Date:

 yyyy:mm:dd
 Time:

 hh:mm:ss
 Control scale interval d :
 Totalisation scale interval d_t :

Rate of sweep:

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Disturbances				Result			
Antenna	Frequency range (MHz)	Polarization	Facing EUT	Load	Indication I	Significant fault (>1 d_t)	
						No	Yes (remarks)
without disturbance							
		Vertical	Front				
			Right				
			Left				
			Rear				
		Horizontal	Front				
			Right				
			Left				
			Rear				
		Vertical	Front				
			Right				
			Left				
			Rear				
		Horizontal	Front				
			Right				
			Left				
			Rear				

Frequency range:: 80 MHz to 2 GHz

Amplitude: 3 V/m (residential, commercial or light industrial environment), or 10 V/m (industrial environment)

Modulation: 80 % AM, 1 kHz sine wave

Note: If EUT fails, the frequency and field strength at which this occurs must be recorded.

☐

Passed

☐

Failed

Remarks:

5.5.1 Radiated electromagnetic susceptibility (continued)

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Disturbances				Result			
Antenna	Frequency range (MHz)	Polarization	Facing EUT	Totalisation indication		No	Significant fault ($>1 d_t$)
				At start of test	At end of test		
without disturbance							
		Vertical	Front				
			Right				
			Left				
			Rear				
without disturbance							
		Horizontal	Front				
			Right				
			Left				
			Rear				
without disturbance							
		Vertical	Front				
			Right				
			Left				
			Rear				
without disturbance							
		Horizontal	Front				
			Right				
			Left				
			Rear				

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Disturbances				Result						
Antenna	Frequency range (MHz)	Polarization	Facing EUT	Totalisation					No	Significant fault (T _c - T _I) Yes (remarks)
				Load	Calculated change T _c	Before adding load T _b	After adding load T _a	Indicated change T _I = T _a - T _b		
without disturbance										
		Vertical	Front							
			Right							
			Left							
			Rear							
without disturbance										
		Horizontal	Front							
			Right							
			Left							
			Rear							
without disturbance										
		Vertical	Front							
			Right							
			Left							
			Rear							
without disturbance										
		Horizontal	Front							
			Right							
			Left							
			Rear							

☐ Passed
☐ Failed

Remarks:

5.5.2 Conducted electromagnetic susceptibility (A.7.4.5.2)

Application No: Temp:

At start	At end

 °C
 Type designation: Rel. h:

 %
 Observer: Date:

 yyyy:mm:dd
 Time:

 hh:mm:ss
 Control scale interval d :
 Totalisation scale interval d_t :

Rate of sweep:

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Disturbances				Result			
Antenna	Frequency range (MHz)	Polarization	Level (volts e.m.f)	Load	Indication I		Significant fault (>1 d_t)
						No	Yes (remarks)
without disturbance							
		Vertical	Front				
			Right				
			Left				
			Rear				
		Horizontal	Front				
			Right				
			Left				
			Rear				
		Vertical	Front				
			Right				
			Left				
			Rear				
		Horizontal	Front				
			Right				
			Left				
			Rear				

Frequency range: 0,15 to 80 MHz
 RF amplitude (e.m.f): 3 V (residential, commercial or light industrial environment), or 10 V (industrial environment)
 Modulation: 80 % AM, 1 kHz sine wave

Note: If EUT fails, the frequency and field strength at which this occurs must be recorded.

☐ Passed ☐ Failed

Remarks:

5.5.2 Conducted electromagnetic susceptibility (continued)

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Disturbances				Result			
Antenna	Frequency range (MHz)	Polarization	Level (volts e.m.f)	Totalisation indication		No	Significant fault ($>1 d_t$) Yes (remarks)
				At start of test	At end of test		
without disturbance							
		Vertical	Front				
			Right				
			Left				
			Rear				
without disturbance							
		Horizontal	Front				
			Right				
			Left				
			Rear				
without disturbance							
		Vertical	Front				
			Right				
			Left				
			Rear				
without disturbance							
		Horizontal	Front				
			Right				
			Left				
			Rear				

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Disturbances				Result						
Antenna	Frequency range (MHz)	Polarization	Level (volts e.m.f)	Totalisation					No	Significant fault (T _c - T _i)
				Load	Calculated change T _c	Before adding load T _b	After adding load T _a	Indicated change T _i = T _a - T _b		Yes (remarks)
without disturbance										
		Vertical	Front							
			Right							
			Left							
			Rear							
without disturbance										
		Horizontal	Front							
			Right							
			Left							
			Rear							
without disturbance										
		Vertical	Front							
			Right							
			Left							
			Rear							
without disturbance										
		Horizontal	Front							
			Right							
			Left							
			Rear							

☐ Passed

☐ Failed

Remarks:

5.5 Electromagnetic susceptibility (continued)

Include a description of the set-up of EUT, e.g. by photos or sketches.

Radiated:

Conducted:

5.6 Electrical transient conduction for instruments powered by road vehicle batteries (A.7.4.6)

5.6.1 Conduction along supply lines of 12 V and 24 V batteries (A.7.4.6.1)

Application No:	Temp: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>At start</td><td>At end</td></tr><tr><td> </td><td> </td></tr></table> °C	At start	At end		
At start	At end				
Type designation:	Rel. h: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> %				
Observer:	Date: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> yyyy:mm:dd				
	Time: <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td> </td><td> </td></tr></table> hh:mm:ss				
Control scale interval d :					
Totalisation scale interval d_t :					

Marked nominal voltage (U_{nom}) of the vehicle's electrical system: V

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Voltage conditions U_{nom}	Test pulse	Pulse voltage U_s	Result			
			Load	Indication I	Significant fault ($>1 d_t$)	
					No	Yes (remarks) ¹²
12 V	2a	+ 50				
	2b ¹³	+10				
	3a	-150				
	3b	+100				
	4	-7				
24 V	2a	+50				
	2b	+20				
	3a	-200				
	3b	+200				
	4	-16				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Voltage conditions U_{nom}	Test pulse	Pulse voltage U_s	Result			
			Totalisation indication		Significant fault ($>1 d_t$)	
			At start of test	At end of test	No	Yes (remarks)
12 V	2a	+ 50				
	2b	+10				
	3a	-150				
	3b	+100				
	4	-7				
24 V	2a	+50				
	2b	+20				
	3a	-200				
	3b	+200				
	4	-16				

¹² Functional status of the instrument during and after exposure to test pulses

¹³ Test pulse 2b is only applicable if the instrument is connected to the battery via the main (ignition) switch of the car, i.e. if the manufacturer has not specified that the instrument is to be connected directly (or by its own main switch) to the battery.

5.6.1 Conduction along supply lines of external 12 V and 24 V batteries (continued)

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Voltage conditions U_{nom}	Test pulse	Pulse voltage U_s	Result						
			Totalisation indication					Significant fault ($T_c - T_i$)	
			Load	Calculated change T_c	Before adding load T_b	After adding load T_a	Indicated change $T_i = T_a - T_b$	No	Yes (remarks)
12 V	2a	+ 50							
	2b	+10							
	3a	-150							
	3b	+100							
	4	-7							
24 V	2a	+50							
	2b	+20							
	3a	-200							
	3b	+200							
	4	-16							

☐ Passed

☐ Failed

Remarks:

5.6 Electrical transient conduction for instruments powered by road vehicle batteries (continued)

5.6.2 Electrical transient conduction via lines other supply lines, for external 12 V and 24 V batteries (A.7.4.6.2)

Marked nominal voltage (U_{nom}) or voltage range: V

Result sheet A - Used in conjunction with result sheet B when the integral control device is used to determine the error

Voltage conditions U_{nom}	Test pulse	Pulse voltage U_s	Result			
			Load	Indication I	Significant fault ($>1 d_t$)	
					No	Yes (remarks) ¹⁴
12 V	a	-60 V				
	b	+40 V				
24 V	a	-80 V				
	b	+80 V				

Result sheet B - Used in conjunction with result sheet A to record the retained totalisation

Voltage conditions U_{nom}	Test pulse	Pulse voltage U_s	Result			
			Totalisation indication		Significant fault ($>1 d_t$)	
			At start of test	At end of test	No	Yes (remarks)
12 V	a	-60 V				
	b	+40 V				
24 V	a	-80 V				
	b	+80 V				

Result sheet C - Used where the total is being increased by continually adding the result of weighing a static load and the totalisation indicator is used to determine the error

Voltage conditions U_{nom}	Test pulse	Pulse voltage U_s	Result					
			Totalisation indication					Significant fault ($T_c - T_i$)
			Load	Calculated change T_c	Before adding load T_b	After adding load T_a	Indicated change $T_i = T_a - T_b$	No Yes (remarks)
12 V	a	-60 V						
	b	+40 V						
24 V	a	-80 V						
	b	+80 V						

☐ Passed

☐ Failed

Remarks:

¹⁴ Functional status of the instrument during and after exposure to test pulses

6 SPAN STABILITY (6.4.1, A.8)

Application No:

Type designation:

Control scale interval d :Resolution during test (smaller than d):

Automatic zero-setting and zero-tracking device is:

☐

Non-existent

☐

Not in operation

☐

Out of working range

Test load =

Measurement No 1: Initial measurement

Observer:

Location:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy:mm:dd
Time:			hh:mm:ss
Bar. Pres:			hPa

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected value ¹⁵
1								
2								
3								
4								
5								

Average error = average ($E_L - E_0$) $(E_L - E_0)_{\max} - (E_L - E_0)_{\min} =$ $0.1 d =$

If $|(E_L - E_0)_{\max} - (E_L - E_0)_{\min}| \leq 0.1 d$, one loading and reading will be sufficient for each of the subsequent measurements: if not, five loadings and readings shall be performed at each measurement.

Remarks:

¹⁵ When applicable, necessary corrections resulting from variations of temperature, pressure, etc. See remarks.

6 Span stability (continued)

Subsequent measurements

For each of the subsequent measurements (at least 7), indicate on the "conditions of the measurement", as appropriate, if the measurement has been performed:

- after the temperature test, the EUT having been stabilized for at least 16 h;
- after the humidity test, the EUT having been stabilized for at least 16 h;
- after the EUT has been disconnected from the mains for at least 8 h and then stabilized for at least 5 h;
- after any change in the test location;
- under any other specific condition.

Measurement No 2:

Observer:

Location:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy:mm:dd
Time:			hh:mm:ss
Bar. Pres:			hPa

Conditions of the measurement:.....

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected value ¹⁶
1								
2								
3								
4								
5								

If five loadings and readings have been performed:

Average error = average ($E_L - E_0$)

Remarks:

¹⁶ When applicable, necessary corrections resulting from variations of temperature, pressure, etc. See remarks.

6 Span stability (continued)

Measurement No 3:

Observer:

Location:

Conditions of the measurement:

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy:mm:dd
Time:			hh:mm:ss
Bar. Pres:			hPa

▲	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected Value ¹⁷
1								
2								
3								
4								
5								

Formatted: French France

If five loadings and readings have been performed: Average error = average ($E_L - E_0$)

Remarks:

Measurement No 4:

Observer:

Location:

Conditions of the measurement:

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy-mm-dd
Time:			hh:mm:ss
Bar. Pres:			hPa

	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected Value
1								
2								
3								
4								
5								

If five loadings and readings have been performed: Average error = average ($E_L - E_0$)

Remarks:

¹⁷ When applicable, necessary corrections resulting from variations of temperature, pressure, etc. See remarks.

6 Span stability (continued)

Measurement No 5:

Observer:

Location:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy:mm:dd
Time:			hh:mm:ss
Bar. Pres:			hPa

Conditions of the measurement:

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0 \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	▲ Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected value ¹⁸
1								
2								
3								
4								
5								

Formatted: French France

If five loadings and readings have been performed:

Average error = average ($E_L - E_0$)

Remarks:

Measurement No 6:

Observer:

Location:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy-mm-dd
Time:			hh:mm:ss
Bar. Pres:			hPa

Conditions of the measurement:

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected Value
1								
2								
3								
4								
5								

If five loadings and readings have been performed:

Average error = average ($E_L - E_0$)

Remarks:

¹⁸ When applicable, necessary corrections resulting from variations of temperature, pressure, etc. See remarks.

6 Span stability (continued)

Measurement No 7:

Observer:

Location:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy:mm:dd
Time:			hh:mm:ss
Bar. Pres:			hPa

Conditions of the measurement:

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

Formatted: French France

	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected value ¹⁹
1								
2								
3								
4								
5								

If five loadings and readings have been performed: Average error = average ($E_L - E_0$)

Remarks:

Measurement No 8:

Observer:

Location:

	At start	At end	
Temp:			°C
Rel. h:			%
Date:			yyyy-mm-dd
Time:			hh:mm:ss
Bar. Pres:			hPa

Conditions of the measurement:

$$E_0 = I_0 + \frac{1}{2} d - \Delta L_0 - L_0, \quad E_L = I_L + \frac{1}{2} d - \Delta L - L$$

	Indication of zero (I_0)	Add. Load (ΔL_0)	E_0	Indication of load (I_L)	Add. Load (ΔL)	E_L	$E_L - E_0$	Corrected value
1								
2								
3								
4								
5								

If five loadings and readings have been performed: Average error = average ($E_L - E_0$)

Remarks:


¹⁹ When applicable, necessary corrections resulting from variations of temperature, pressure, etc. See remarks.

6 Span stability (continued)

Application No:

Type designation:

Plot on the diagram the indication of temperature test (T), damp heat test (D) and disconnections from the mains power supply (P)

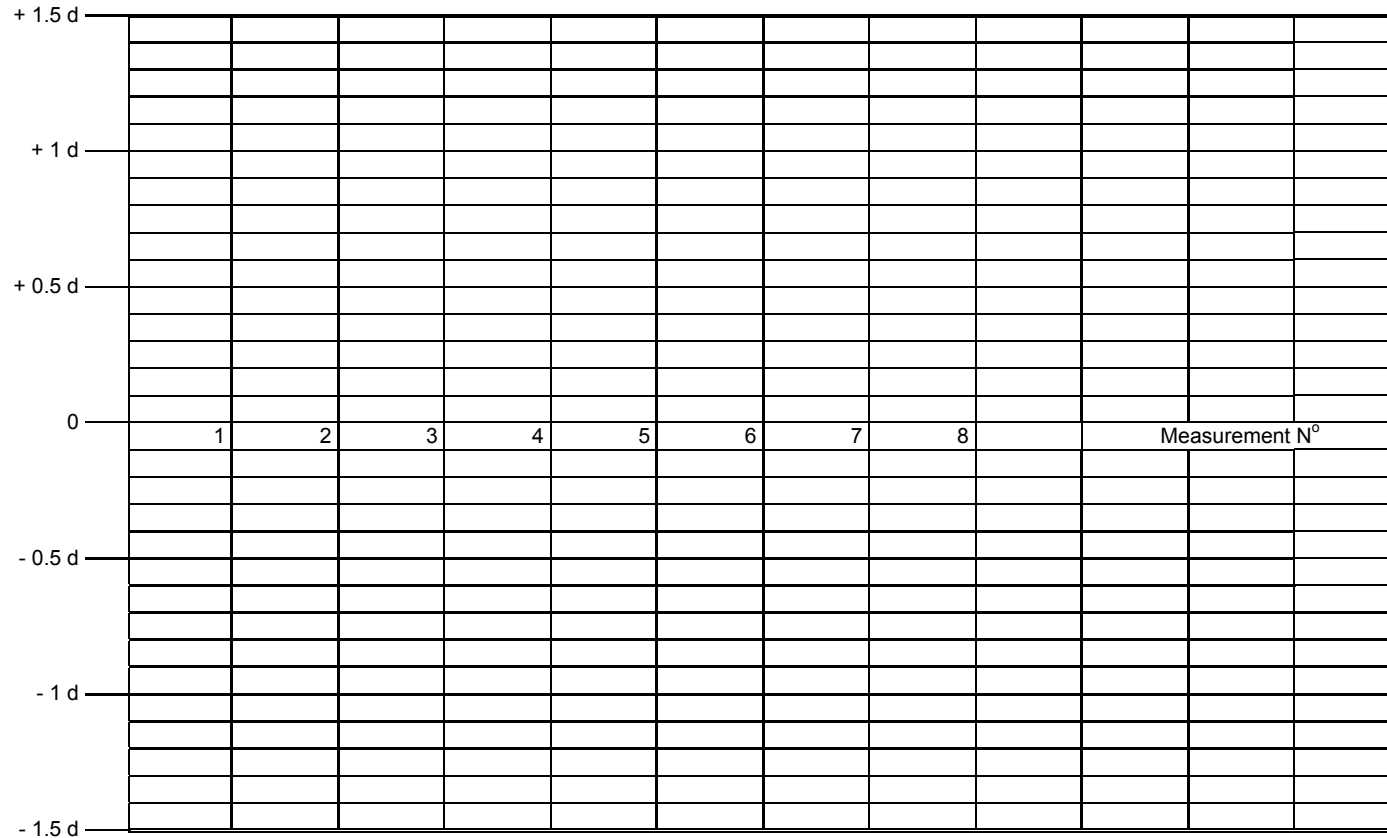

Maximum allowable variation:

☐ Passed ☐ Failed

Remarks:

7 Material tests (6.4, A.5.1)**7.1 Material testing (separate verification method) (6.2, A.5.1.1)**

Application No:		Temp:	At start	At end	°C
Type designation:		Rel. h:			%
Observer:		Date:			yyyy:mm:dd
Control scale interval d :		Time:			hh:mm:ss
Totalisation scale interval d_t :					
Material:					
Condition of material:					
Nominal load:					

Parameter	Results
Number of loads	
Indicated total at start T_S	
Indicated total at end T_F	
$I = T_F - T_S$	
Control instrument indication for total load L	
$\text{Error} = \frac{I - L}{L} \times 100\%$	

Note: Minimum of three material tests required (as specified in [6.1\(d\)](#)). Reproduce this sample test report to record the results of the other material tests as appropriate.

☐

Passed

☐

Failed

Remarks:

8 EXAMINATION OF THE CONSTRUCTION OF THE INSTRUMENT

Use this page to indicate any description or information pertaining to the instrument, additional to that already contained in this report and in the accompanying national type approval or OIML certificate. This may include a picture of the complete instrument, a description of its main components, and any remark which could be useful for authorities responsible for the initial or subsequent verifications of individual instruments built according to the type. It may also include references to the manufacturer description.

Description:

Remarks:

9 CHECKLIST

The checklist has been developed based on the following principles:

To include requirements that cannot be tested according to test 1 through 10 above, but shall be checked visually, e.g. the descriptive markings (3.11);

To include requirements which indicate prohibitions of some functions, e.g. semi-automatic zero-setting devices shall not be operable during automatic operation (3.6.1.3.);

Not to include general requirements, e.g. suitability for use (3.1);

Not to include requirements that allow functions or devices to be used, e.g. a combined semi-automatic zero-setting and tare device operated by the same key (3.6.1.3).

This checklist is intended to serve as a summary of the results of examinations to be performed and not as a procedure. The items on this checklist are provided to recall the requirements specified in R 107-1 and they shall not be considered as a substitution for these requirements.

The requirements that are not included in this type evaluation report (test 1 through 10 and checklist 12) are considered to be globally covered by the type approval or OIML certificate (e.g. classification criteria [2.2 and 2.3], suitability for use [3.1]).

For non-mandatory devices, the checklist provides space to indicate whether or not the device exists and, if appropriate, its type. A cross in the box for "present" indicates that the device exists and that it complies with the definition given in the terminology; when indicating that a device is "not present", also check the boxes to indicate that the tests are not applicable (see p. 5).

If appropriate, the results stated in this checklist may be supplemented by remarks given on additional pages.

9.1 CHECKLIST

Application No:

Type designation:

Requirement (R 107-1)	Test procedure	Totalizing hopper weigher checklist	Passed	Failed	Remarks
23	<u>Observe</u>	Form of the scale interval : 1×10^k , 2×10^k , or 5×10^k			
25	A.6.2	Agreement between indicating and printing devices:			
		For the same load, the difference between the weighing results provided by any two devices having the same scale interval is:			
		– zero for digital indicating or printing devices;			
		– not greater than the absolute value of the MPE for automatic weighing for analogue devices.			
26		Units of measurement: g, kg, t			
3		Technical requirements			
31	A.1.4	Instrument is designed to suit intended materials and usage and is of adequately robust construction in order that it maintains its metrological characteristics			
32	<u>Observe</u>	Security of operation			
3.2.1		No characteristics likely to facilitate fraudulent use			
3.2.2		Effect of accidental breakdown or maladjustment is evident			
3.2.3		Operation unaffected by incomplete discharge			
3.2.4		Interruption of automatic operation, printing inhibition or marked, or clear warning of usage at loads greater than $\text{Max } X \ 9 \ d_t$ and less than Min			
3.2.5	A.6.3	Adjustment prevented in operational mode, except during tests in accordance with 6.2.1.2.1			
3.2.6	<u>Observe</u>	Controls come to rest in intended positions and unambiguously marked keys			
3.2.7	<u>Observe</u>	Dust extraction: shall not affect measurement			
3.2.8	A.6.4	Securing of components and pre-set controls	Present []	Not-Present []	
	<u>Observe</u>	Access/adjustment prohibited and automatically self-evident			
3.2.9	<u>Observe</u>	External influence practically impossible after securing			
33	A.6.5	Indication, storage and printing of weighing results			
	<u>Observe</u>	Totalisation, storage and printing devices:			
		Principal	Present []	Not-Present []	
		Supplementary	Present []	Not-Present []	
		Partial	Present []	Not-Present []	
		Memory storage	Present []	Not-Present []	
		Printer	Present []	Not-Present []	
33.1	<u>Observe</u>	Quality of indication:			
		Reliable, easy and unambiguous under normal conditions			
		Overall inaccuracy of an analogue device $< 0.2 \ d_t$			

Formatted Table

Requirement (R 107-1)	Test procedure	Totalizing hopper weigher checklist	Passed	Failed	Remarks
		Figures forming the results shall be of a size, shape and clarity for reading to be easy			
		Scales, numbering and printing shall permit the figures to be read by simple juxtaposition			
3.3.2	<u>A.6.5</u>	Form of the indication:			
3.3.2.1	<u>Observe</u>	Results contain names and symbols of the units of mass			
		For any one indication, only one unit of mass			
		Decimal sign to separate integer and decimal fraction			
		Zero displayed to the extreme right without a decimal sign			
		Units of mass written in small letters (lower case)			
3.3.2.2	<u>Observe</u>	Scale interval:			
		Except supplementary devices all devices have the same scale interval			
		Scale interval in the form specified in R107-1 (2.3)			
		<u>All indicating, printing and tare weighing devices of an instrument shall, within any one weighing range have the same scale interval for any given load.</u>			
		<u>For supplementary devices, scale interval resolution mode is at least ten times d_i in the descriptive markings</u>			
3.3.2.3	<u>Observe</u>	Digital zero indication			
		<u>Where the scale interval is changed automatically the decimal sign shall maintain its position in the display.</u>			
		<u>A decimal fraction shall be separated from its integer by a decimal sign (comma or dot), with the indication showing at least one figure to the left of the sign and all figures to the right.</u>			
		<u>The decimal sign shall be on one line with the bottom of the figures (example: 0.705 kg).</u>			
		<u>A digital zero indication shall include the display of a zero for all places that are displayed to the right of a decimal point and at least one place to the left. When no decimal values are displayed, a zero shall be displayed for each place of the displayed division, (i.e. at least one active decade plus any fixed zeros must be displayed).</u>			
3.3.3	<u>A.6.5</u>	Limits of indication, storage and printing:			
	<u>Observe</u>	<u>Instruments complies</u> with the requirements in 3.2.4			
	<u>Observe</u>	On instruments with printing device: Not possible to reset principle totalisation device without auto printing <u>or storage</u>			
	<u>Observe</u>	<u>Automatic printout or storage of the last total if operating interruption/adjustments</u>			
3.3.4	<u>A.1.2</u>	Printing device:	<u>Present []</u>	<u>Not-Present []</u>	
	<u>Observe</u>	<u>A totalisation indicating and printing device shall allow reliable, clear and unambiguous reading of the results by simple juxtaposition and shall bear the symbol of the appropriate unit of mass</u>			
	<u>Observe</u>	<u>Printing shall be inhibited if the stability criteria in 3.3.7 are not fulfilled.</u>			
	<u>Observe</u>	<u>Printing inhibited when stability criteria R107-1 (3.3.7) not fulfilled</u>			

Requirement (R 107-1)	Test procedure	Totalizing hopper weigher checklist	Passed	Failed	Remarks
3.3.5	<u>A.1.2</u> <u>Observe</u>	Memory storage device: Memory storage and transfer of results inhibited when stability criteria R107-1 (3.3.7) not fulfilled	Present []	Not-Present []	
3.3.6	<u>Observe</u> <u>Observe</u>	Combined indicating devices: Combined indication on demand clearly identified.	Present []	Present []	
3.4	<u>A.1.1</u>	<u>Software controlled instruments:</u> <u>Alteration of the metrologically relevant software is not possible without breaking a seal, or automatically generating a signal by means of an identification code.</u> <u>Manufacturer declare and describes metrologically relevant embedded software</u> <u>The software shall be assigned with a fixed version number or software identification. This version number shall be adapted in the case of every software change that may affect the functions and accuracy of the instrument.</u> <u>Software controlled instruments shall be capable of providing the software identification.</u> <u>The manufacturer shall submit the following software information:</u> <u>A description of the system hardware, e.g. block diagram, type of computer(s), type of network, if not described in the operating manual;</u> <u>A description of the software environment for the metrologically relevant software, e.g. the operating system, required drivers, etc;</u> <u>A description of all legally relevant software functions, legally relevant parameters, switches</u> <u>A description of the relevant measuring algorithms (e.g. stable equilibrium, price calculation, rounding algorithms);</u> <u>Software identification that is clearly assigned to the metrologically relevant functions;</u> <u>A description of the relevant menus and dialogues, and set of commands and parameters;</u> <u>The securing measures foreseen (e.g. checksum, signature, audit trail);</u> <u>Securing measures (including a detailed description of the protective interface, loading procedure and the securing measures against accidental or intentional changes ;</u> <u>In case of long-term storage or transmission of data via networks: a description of the data sets and protection measures, memory storage device(s), etc.</u>			
3.6	<u>Observe</u>	Ancillary devices: Ancillary devices shall not affect the indicated totalisation(s) representing a bulk load for a transaction.			
3.6.1	<u>A.5.5</u>	Zero-setting: Instrument tare weigh after each discharge			

Requirement (R 107-1)	Test procedure	Totalizing hopper weigher checklist	Passed	Failed	Remarks
36.1.3	<u>Observe</u>	Zero-setting –devices:	Present		Not-Present
		Initial zero-setting	[]		[]
		Automatic zero-setting	[]		[]
		Semi-automatic zero-setting	[]		[]
		Non-automatic zero-setting	[]		[]
		Zero-tracking - not more than one	[]		[]
	A.5.5.5	Accuracy of zero-setting $\leq 0.25 d_t$			
		Effect of zero-setting device does not alter the maximum weighing capacity			
	<u>A.5.5.2</u>	Overall effect of:			
		Zero-setting <u>range</u> < 4%			= %
		Initial zero-setting < 20%			= %
	<u>A.6.8.1</u>	<u>Control of zero-setting:</u>			
	<u>Observe</u>	<u>An interlock shall be provided to stop an automatic operation if the zero indication varies by or more than:</u>			
		– <u>1 d_t on instruments with an automatic zero-setting device, or</u>			
		– <u>0.5 d_t on instruments with a semi-automatic or non-automatic zero-setting device.</u>			
		<u>Semi-automatic zero-setting device shall function only when the instrument is in stable equilibrium (3.3.7).</u>			
	<u>A.5.5.6</u> <u>Observe</u>	<u>A non-automatic or semi-automatic zero-setting device shall not be operable during automatic operation.</u>			
		<u>Stability of automatic zero-setting device</u>			
		Automatic zero-setting operates:			
		At start of automatic operation:			
		As part of automatic weighing cycle, or			
		After a programmable interval			
		Only when stable equilibrium R107-1 (3.3.7)			
		Sufficiently often to maintain zero within $0.5 d_t$			
		When operating as part of every weighing cycle, it is not possible to disable or set at time intervals			
		Maximum programmable time interval:			
		Specified by the manufacturer			
		Not greater than the value necessary to ensure that the zero error is not greater than $0.5 d_t$			
36.1.4	<u>Observe</u>	After maximum programmable time interval automatic zero-setting capable of:			
		automatic zero-setting after allocated time interval, or			
		stopping the instrument to enable zero-setting, or			
		generating information to overdue zero-setting			

Requirement (R 107-1)	Test procedure	Totalizing hopper weigher checklist	Passed	Failed	Remarks
3.7 3.7.1 3.7.2 3.7.3 3.7.4	A.1.4 <u>Observe</u>	Descriptive markings:			
		Markings shown in full:			
		Identification mark of the manufacturer			
		Identification mark of the importer (if applicable)			
		Serial number and type designation of the instrument			
		Product description			
		Product density (kg/dm ³)			
		Load receptor (hopper) volume (dm ³)			
		Control scale interval (if applicable) = g or kg or t			
		Electrical supply voltage (V)			
		Electrical supply frequency (Hz)			
	<u>Observe</u>	Pneumatic/hydraulic pressure (if applicable) (kPa or bar)			
		software identification			
		Markings shown in code:			
		Type approval sign			
		Indication of the class of accuracy: 0.2, 0.5, 1 or 2			
		Totalisation scale interval d _t (g or kg or t)			
		Maximum capacity Max (g or kg or t)			
	<u>Observe</u>	Minimum capacity Min (g or kg or t)			
		Minimum totalized load Σ_{min} (g or kg or t)			
	<u>Observe</u>	Supplementary markings:			
		Any additional markings	enter in remarks		
	<u>Observe</u>	Presentation of descriptive markings:			
		Indelible and of size, shape and clarity that allows easy reading			
		Shown in an official language in accordance with national legislation.			
		Grouped together in a clearly visible place either on a descriptive plate or sticker fixed permanently near the indicating device, or on a non removable part of the instrument itself			
		In case of a plate or sticker which is not destroyed when removed, a means of securing shall be provided.			
		Shown on a programmable display, with:			
		– at least Max, Min and d _t shall be displayed as long as the instrument is switched on.			
		– the other marking may be shown on manual command			
		– access automatically and non-erasably recorded			
		– made evident by an audit trail			
		Programmable display markings need not be repeated on the data plate, if they are shown on or indicated near the display of the weighing result			

Requirement (R 107-1)	Test procedure	Totalizing hopper weigher checklist	Passed	Failed	Remarks
<u>3.8</u>	<u>A.1.4</u>	Verification marks			
	<u>Observe</u>	Position of verification marks:			
3.8.1		Cannot be removed without damaging the marks			
		Allows easy application of marks			
3.8.2		Visible without the instrument having to be removed			
		Verification mark support which ensures conservation of the marks			
4.2	<u>A.1.5</u>	Functional requirements			
4.2.1	<u>Observe</u>	– Acting upon significant faults:			
		– Instrument is made inoperative automatically, or			
		– Visual or audible indication is provided automatically and is continuous until the user takes action or the fault disappears			
		– Totalized load information is retained when a significant fault occurs			
4.2.2	<u>Observe</u>	Indicator display test:			
		For displays other than non-segmented displays, upon switch-on all relevant signs of indicating device are active and non-active for sufficient time to be checked by operator			
4.2.5		No indication or transmission of weighing results during warm-up time, and			
		Automatic operation is inhibited			
<u>4.2.6</u>	<u>A.7.2.2</u>	Interfaces			
	<u>Observe</u>	Interfaces when fitted:			
		Has no adverse effect on functions, indications and transmission of data by connected peripheral devices			
		Functions performed or initiated through the interface meet relevant requirements of Clause 3.			
		A protective interface prevents the introduction into the instrument data that can influence the instruments metrological properties or measurement results			
4.2.7	A.6.6	AC mains supply failure:			
	<u>Observe</u>	Metrological information to be retained for at least 24 hours			
	<u>Observe</u>	Switch-over to emergency power supply shall not cause significant fault			
4.2.8	A.6.7	Voltage variations of external or plug-in (AC or DC) power supply	Present []	Not-Present []	
		Battery power supply:	Present []	Not-Present []	
	<u>Observe</u>	When below the specified voltage value:			
	<u>Observe</u>	Continues to function correctly, or			
	<u>Observe</u>	Is automatically put out of service			

<u>Requirement</u> (R 107-1)	<u>Test</u> <u>procedure</u>	<u>Totalizing hopper weigher checklist</u>	<u>Passed</u>	<u>Failed</u>	<u>Remarks</u>
5.1.1	A.1.1	<u>Documentation includes:</u>			
		<u>Metrological characteristics of the instrument</u>			
		<u>A standard set of specifications for the instrument</u>			
		<u>A functional description of the components and devices</u>			
		<u>Drawings, diagrams and general software information explaining the construction and operation</u>			
		Details of fractions P _i (modules tested separately)			
		Any document or other evidence that the design and construction of the instrument complies with the requirements of the recommendation			
		<u>Examination of:</u>			
		Documents			
		Functional checks			
		Test reports from other authorities			
6.4	A.5.1.1	Instruments subjected to material tests in accordance with:			
		Separate verification method as in A.5.2, or			
		Integral verification method as in A.5.3			

Use this space to detail remarks from the checklist